

# PSD 40-15 – Dual Rail DC Power Supply



- **±15 VDC outputs**
- **1 AMP continuous output current**
- **DIN rail mount for easy installation**
- **Rugged design**
- **UL listed** (including for hazardous environments)
- **CE certified**
- **RoHS compliant**

## DESCRIPTION

The PSD 40-15 switching power supply is designed for optimum operation of our DC sensors including our DC LVDTs, RVDTs, RVITs and Gage Heads. As the current capability is 1A continuous, it can operate multiple sensors. The compact design features a DIN standard rail mount, for secure installation in most industrial environments.

The PSD 40-15 has the following UL approvals:

- UL/C-UL listed UL 508
- UL/C-UL Recognized UL 60950
- UL/C-UL Listed UL 1604 Class I, Division 2, Groups A, B, C, D

Measurement Specialties, Inc. (NASDAQ MEAS) offers many types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.sensorway.cn>

MEAS acquired Schaevitz Sensors and the **Schaevitz®** trademark in 2000.

## FEATURES

- 115/230 VAC input
- 45 to 65Hz input frequency
- Low noise output
- Overload and short circuit protection

## APPLICATIONS


- Use with our DC position sensors
- DIN rail or chassis mount applications
- Multiple sensor applications

## PERFORMANCE SPECS

Input		Output	
Input Voltage	85 to 264 VAC	Output Voltage	±15 VDC ±1%
Input Frequency	45 to 65 Hertz	Output Current	1 Amp continuous
Input current at 120VAC	600mA maximum	Ripple	<30mV peak to peak
Input current at 230VAC	400mA maximum	Overload protection	Internal fuse
		Short circuit protection	Internal fuse
Other			
Operating temperature	-25°C to +70°C	Storage temperature	-40°C to +85°C
Weight	250 grams	Conductor cross-section	2.5 mm <sup>2</sup> maximum

# PSD 40-15 – Dual Rail DC Power Supply

## DIMENSIONS

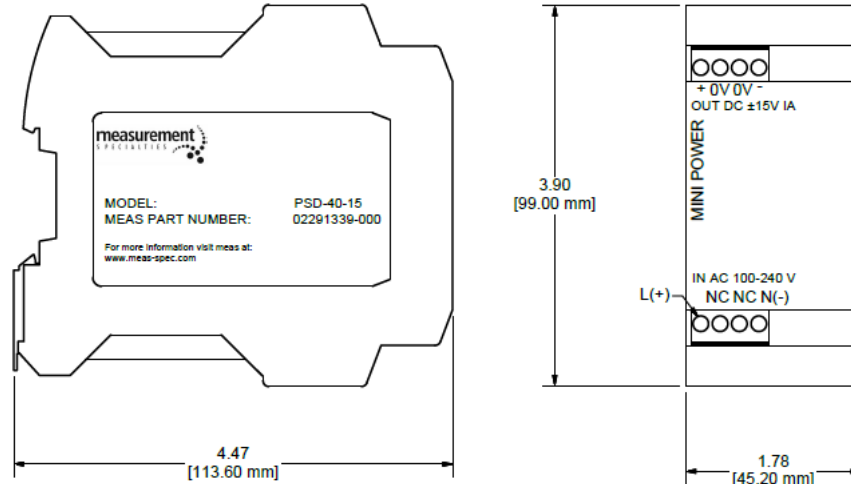

Dimensions are in inch [mm]

## ORDERING INFORMATION

Description	Part Number
PSD 40-15, Dual Rail DC Power Supply	02291339-000

## TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20	北京赛斯维测控技术有限公司 北京市朝阳区望京西路48号 金隅国际D座302 电话：+86 010 8477 5646 传真：+86 010 5894 9029 邮箱： <a href="mailto:sales@sensorway.cn">sales@sensorway.cn</a> <a href="http://www.sensorway.cn">http://www.sensorway.cn</a>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.